

piFLOW®

Simplifying material handling



Our Mission

“Our mission is to increase productivity for industrial customers and provide energy saving solutions by promoting our superior technology universally.”



Vacuum conveying and its great benefits

Vacuum conveying is a modern way of transporting powders and granules with a number of benefits, see below.

Reduce product scrap and product contamination

When using a vacuum conveyor your customers are working with an enclosed system where they will not have any foreign material mixed in or have any product falling off the sides into the surrounding area. It is also a very gentle way of transporting the product, meaning that the product will be intact/not damaged throughout the whole transportation process. The velocity is adjusted depending on the product's fragility – giving your customer minimum product scrap.

Small Footprint

The vacuum conveying solution has a small plant floor footprint since the tubing can go strictly vertical from the point of suction. The tubing is normally mounted in level with the discharge point and therefore not in conflict with other machinery. This means that your customer can utilize the space in a more cost efficient way.

Minimize maintenance

Piab's vacuum conveyors have very few moving parts, meaning that the service and maintenance cost is kept at a very low level without needing to compromise on the reliability of the system. You can disassemble the conveyor body without using tools. The pump unit is designed with a separate vacuum module that can easily be removed for cleaning, resulting in reduced downtime.

Dust free working environment

When comparing with mechanical conveying systems such as screw and belt conveyors – another important advantage of the vacuum conveying is a dust free working environment. As vacuum conveying is an enclosed system you will be able to improve the working environment, and it will also give you the possibility to convey materials that are hazardous to inhale that needs to be contained.



Production flexibility

By replacing just a few parts of the modular vacuum conveying solution, one can easily change the installation in order to increase conveying distance, change the plant layout or enhance the system capacity at a very reasonable cost. This gives a future proof installation without compromising the reliability of the system.

The principle of vacuum conveying




- ▶ Vacuum is created with compressed air through COAX® technology (A). The pump can be automatically controlled.
- ▶ The bottom valve (B) closes and the vacuum increases in the container (C) and the conveying line (D).
- ▶ The product is carried away from the feed station (E) into the conveying line and then to the container.
- ▶ The filter (F) protects the pump and the surrounding area from dust and small particles.
- ▶ During the conveying time, the air shock tank (G) is filled with compressed air.
- ▶ At a preset time, the pump and the conveying are stopped and the bottom valve (B) is opened. The product is discharged at the same time as the air shock is activated and the compressed air cleans the filter from dust and small particles.
- ▶ When the pump starts again, this process is repeated and a new cycle starts. The suction time and emptying times are normally controlled by a pneumatic or an electric control system.



Increase your customers energy efficiency through COAX[®] technology

COAX[®] cartridges are based on advanced technology for creating vacuum with compressed air. The COAX[®] cartridges are smaller, more efficient and more reliable than conventional ejectors, which allows for the design of a flexible, modular and efficient vacuum system. A vacuum system based on COAX[®] technology can provide your customer with three times more vacuum flow than conventional systems, while reducing energy consumption.

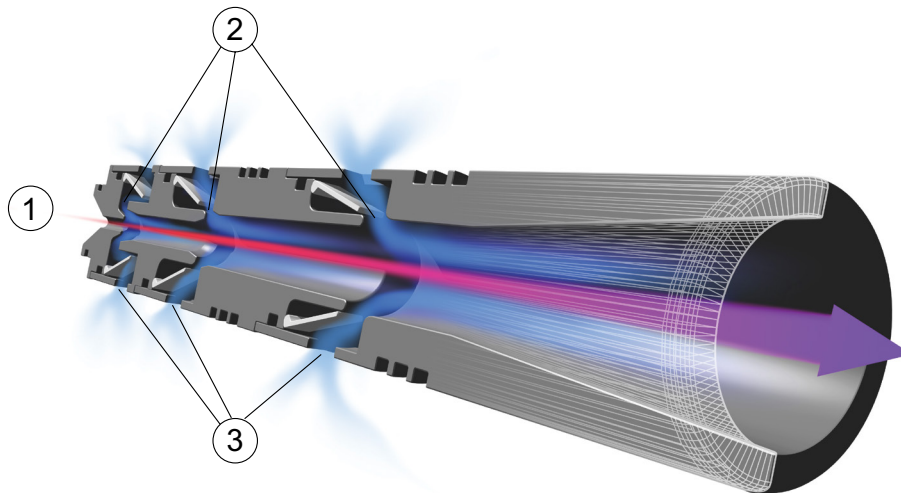

When compressed air (1) passes through the nozzles (2), air is pulled through with the stream of compressed air. Suction will be generated at the opening of each stage (3), resulting in vacuum.



Pump *piPREMIUM* suitable for *piFLOW[®]p*



Pump *piBASIC* suitable for *piFLOW[®]i* and *piFLOW[®]f*

piFLOW[®]p

The piFLOW[®]p is best used when a premium technology is needed, e.g. in the food and pharmaceutical industries. It is made of steel quality ASTM 316L. The design makes it very easy to use and install. It is available with antistatic filters and seals and also with automatic filter cleaning.

Tailor your own conveyor without compromising quality

When you have a need to tailor make your conveyor and still have the high requirement on hygiene, piFLOW[®]p is the best option. It is built on standard modules and you can combine and change them in almost endless combinations. All parts still meet the high requirements of the pharma and food industries. So, you have the possibility to tailor your own conveyor without compromising on quality.



Industry standards



Piab offers conveyors for ATEX Dust applications. piFLOW[®]p is type examined according to ATEX Dust by a third party. Piab has a quality management system which fulfills the high standards that is required for delivering ATEX Dust equipment on a regular basis.



All material that is in contact with the conveyed product fulfill the requirements issued by the U.S. Food and Drug Administration (FDA).



The piFLOW[®]p fulfills the requirement issued by the United States Department of Agriculture (USDA).

IQ/OQ documents are available.


piFLOW[®]i and piFLOW[®]f

The piFLOW[®]i is a basic conveyor widely used in the general industry and sometimes in the chemical industry. piFLOW[®]f is a basic conveyor but still the most cost efficient powder conveying concept for the food industry. Both conveyor models are made of steel quality ASTM 304L. The design makes them very easy to use and install. There is a choice of filters, washable and antistatic filters are available and also antistatic seals can be delivered.

Maximize your customer's throughput

The piFLOW[®]i/f series are designed with a full opening option making it possible for your customer to maximize the material throughput and increase the overall capacity of their system. The full opening gives an instant discharge, i.e. increased material throughput.

Performance

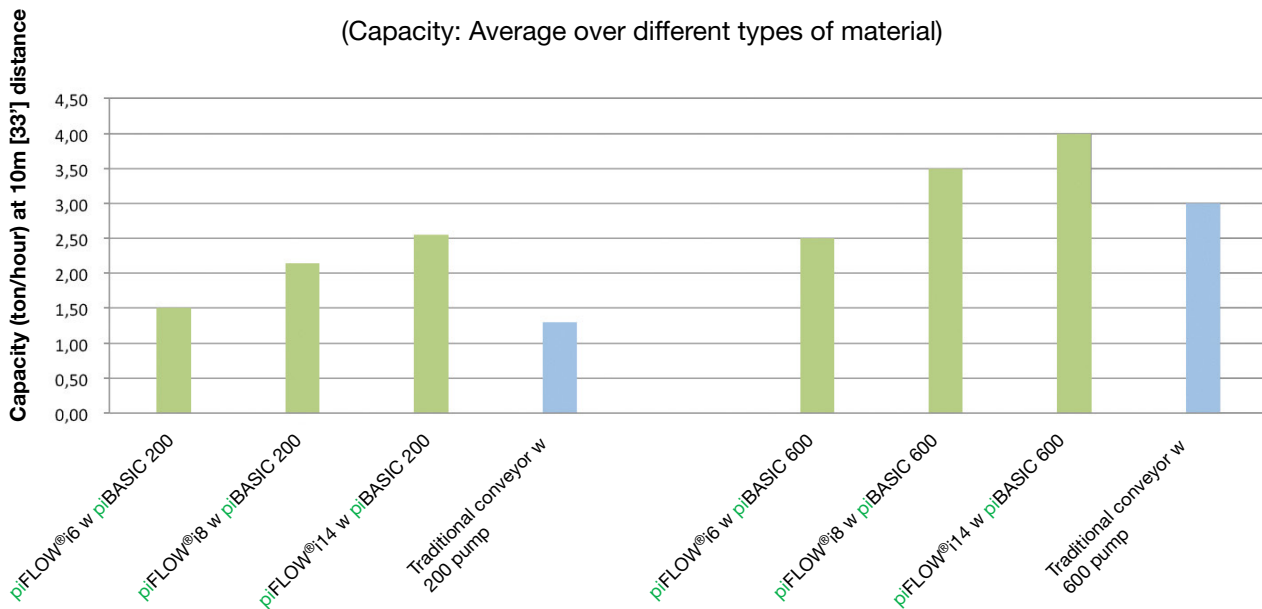

Industry standards



Piab offers conveyors for ATEX Dust applications. piFLOW[®]i and piFLOW[®]f are type examined according to ATEX Dust by a third party. Piab has a quality management system which fulfills the high standards that is required for delivering ATEX Dust equipment on a regular basis.



All material used for piFLOW[®]f which is in direct contact with the conveyed product fulfill the requirements issued by the U.S. Food and Drug Administration (FDA).

Optimize your vacuum conveyor

Filter

Filter type	Material	Grade of filtration	Applications	Quality standards
Pleated Filter	Polyester	0.5µm	Extreme fine and free flowing powder	ATEX, FDA
Pleated Rod Filter	Polyethylene	0.5µm	Fine powder	ATEX (only the black filter), FDA
Textile Filter bags	Polyester	5µm	Granules	ATEX, FDA, Food quality



Pleated Filter



Pleated Rod Filter



Textile Filter bags

Control units

Piab control units are fully pneumatic operated with an extremely reliable function. The full pneumatic design also removes any source of ignition from the system and at the same time simplifies the validation process.



Control unit CU is integrated in a stainless steel box for hygienic requirements. The unit is designed to control all functions of the conveyor with simple installation and settings of the timers. The CU is compliant with ATEX.

Control unit PPT is designed to control the basic functions of the conveyor. The unit can be ordered with or without manual start/stop. The PPT is compliant with ATEX.



The Valve unit VU-EP is designed to convert an electrical signal to a pneumatic signal, when there is a need to control the conveyor with a PLC or similar electrical control systems. The unit is prepared for connection to Piab conveyors main functions and is therefore easy to install.

Feed point

The surrounding air is the carrier of the product and should be added at the feed point. Is the product to be conveyed directly from a container? Is it to be picked up from up high or down low? Piab offers many different options from Feed nozzles and Feed adapters to Feed stations.



Feed nozzles and suction pipes

To manually feed the conveyor directly from bags, barrels, buckets, etc. The air flow intake into the nozzle can be adjusted to optimize the transport of the product into the conveying line.



Feed adapters

The feed adapters are suitable for Piab feed station, customized hoppers, big bag unloaders or silos. The feed adapters can adjust the carrying air to optimize the transport of the product into the conveying line.



Feed station


The feed station should be placed under a big bag or for dumping small bags. It has fluidization as an option for sticky, bridging, non-free flowing products to make the transport problem-free.

Piping

Pipes have lower friction (faster and gentler conveying) than hoses and should be used in all stationary installations. Total conveying distance, vertical distance, number of pipe bends, diameter, whether you are using steel pipes, vacuum hoses or a combination of pipes and hoses, the type of connections between the pipes, these are all factors to consider when you choose piping system.



Stainless steel pipe bend

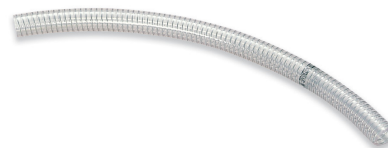

PVC hose

Warranty

Piab offers a warranty to distributors, integrators and users of Piab products worldwide as per the following definitions:

- ▶ A five-year warranty is valid for complete vacuum conveyors excluding blower pumps and controls.
- ▶ A five-year warranty is valid for vacuum pumps excluding blower pumps, accessories and controls.
- ▶ A one-year warranty is valid for other products.

General warranty principals:

- ▶ Piab guarantees against defects in the manufacture and materials by normal use in a proper environment, when following the instruction for care, maintenance and control described in the appropriate Piab manual.
- ▶ Piab replaces or repairs, free of charge, faulty products provided that these are returned to Piab and found to be covered by the warranty.
- ▶ It is at Piab's discretion whether a faulty product should be sent back to Piab for replacement or if the repair shall be made locally at Piab's expense.
- ▶ This warranty does not include wear parts such as filter elements, seals, hoses, etc.
- ▶ This warranty does not include subsequent damages caused by defective products.

piFLOW®

Integrate 60 years of global vacuum experience into your solution

With more than 60 years of experience we are the leader within vacuum technology – that is our core business. We have built up a global expertise in vacuum conveying that you now can easily access.

We have integrated our products in various industries e.g. Consumer and food, Pharmaceutical and Chemical. Now we are opening up the possibility for you to integrate the vacuum conveyor as a part of your solution. This gives you the possibility to focus your resources on your core business.

With our world-wide sales offices, we will be your local conveying expert for you to grow your business.

Short delivery time


Our vacuum conveyors are all designed through a modular program based on standard components. This gives you the possibility to convey a wide range of different customer products, still with a limited number of standard modules. Hence you can depend on the piFLOW® being available with a short delivery time, avoiding costly stock.

Instant access to all documentation

To simplify the process we give you access to our unique web interface where you are able to configure your product and download relevant documentations e.g. CAD files, datasheets, manuals etc. This gives you the benefit of being in control of your projects in an easy way.



The piFLOW[®]i and piFLOW[®]f series – The most cost efficient alternatives to other conveying methods




Screw



piFLOW[®]i and piFLOW[®]f



Cable

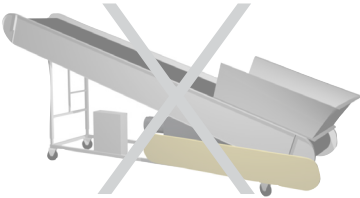


Belt


piFLOW[®]p – Integrate the state of the art component with your solution



Processing




Packaging



Weighing




piFLOW[®]p




Dosing




piFLOW[®] Conveyor Customer Code




Model	Code
piFLOW [®] i	I
piFLOW [®] f	F




Pump size	Code
piBASIC100	BA100
piBASIC200	BA200
piBASIC400	BA400
piBASIC600	BA600
No pump	0



Filter type	Code
Textile filter 02	TX2
Textile filter 04	TX4
Pleated filter 02	P2
Pleated filter 04	P4
Pleated rod filter 02	PR2
Pleated rod filter 04	PR4



Inlet diameter	Code
Inlet Ø 32 (1 ¼")	32
Inlet Ø 38 (1 ½")	38
Inlet Ø 51 (2")	51
Inlet Ø 76 (3")	76
No Inlet	0



Batch volume	Code
Volume 6L (0.21 cf)	6
Volume 8L (0.28 cf)	8
Volume 14L (0.49 cf)	14
No volume	0

Model	Code
piFLOW [®] p	P

Pump size	Code
piPREMIUM64	P64
piPREMIUM100	P100
piPREMIUM200	P200
piPREMIUM400	P400
piPREMIUM600	P600
piPREMIUM800	P800
Vacuum Conn. 2.5"	VC2
Vacuum Conn. 3"	VC3
Vacuum Conn. 4"	VC4

Filter type	Code
Textile filter 01	TX1
Textile filter 02	TX2
Textile filter 04	TX4
Textile filter 06	TX6
Pleated filter 00	P0
Pleated filter 02	P2
Pleated filter 04	P4
Pleated filter 06	P6
Pleated rod filter 00	PR0
Pleated rod filter 01	PR1
Pleated rod filter 02	PR2
Pleated rod filter 04	PR4
Pleated rod filter 06	PR6


Inlet diameter	Code
TC Inlet Ø 25 (1")	25T
TC Inlet Ø 51 (2")	51T
TC Inlet Ø 76 (3")	76T
TC Inlet Ø 102 (4")	102T
Inlet Ø 25 (1")	25
Inlet Ø 32 (1 ¼")	32
Inlet Ø 38 (1 ½")	38
Inlet Ø 51 (2")	51
Inlet Ø 63 (2 ½")	63
Inlet Ø 76 (3")	76
Inlet Ø 102 (4")	102
No Inlet	0

Batch volume	Code
Volume 2L (0.07 cf)	2
Volume 3L (0.11 cf)	3
Volume 7L (0.25 cf)	7
Volume 14L (0.49 cf)	14
Volume 56L (1.98 cf)	56
No volume	0

I . BA100 . TX2 . 32 . 6 .




Discharge type	Code
Cone Opening	C
Full Opening	F
No discharge	0



Control	Code
Control VU EP-1	EP
Control PPT/RS	RS
No control	0



Material	Code
Antistatic & AL	AAL



Special Technical documents	Code
ATEX	EX
No special documentation	0



Language	Code
Manual SE	SE
Manual GB	GB
Manual DE	DE
Manual IT	IT
Manual ES	ES
Manual FR	FR
Manual US	US
Manual DK	DK
Manual FI	FI
Manual NL	NL
Manual PL	PL
Manual PT	PT
Manual RO	RO
Manual CZ	CZ
Manual NO	NO

Discharge type	Code
Cone Opening	C
Full Opening	F
Cone Opening, bridging	CB
No discharge	0

Control	Code
Control VU EP-1	EP
Control CU-1A	1A
Control CU-1B	1B
Control CU-2A	2A
Control CU-2B	2B
Control PPT/RS	RS
No control	0

Material	Code
Antistatic & AL	AAL
Antistatic & SS	ASS
Silicon & AL	QAL
Silicon & SS	QSS

Special Technical documents	Code
ATEX	EX
2.2	2
IQ/OQ	Q
ATEX + 2.2	EX2
IQ/OQ + ATEX	QEX
IQ/OQ + 2.2	Q2
IQ/OQ + 2.2 + ATEX	Q2EX
No special documentation	0

C . RS . AAL . EX . GB

Piab offers a warranty to distributors, integrators and users of Piab products worldwide as per the following definitions:

- ▶ A five-year warranty is valid for complete vacuum conveyors excluding controls.
- ▶ A five-year warranty is valid for vacuum pumps excluding accessories and controls.
- ▶ A one-year warranty is valid for other products.

General warranty principles:

- ▶ Piab guarantees against defects in the manufacture and materials by normal use in proper environment, when following the instructions for care, maintenance and control described in the appropriate Piab manual.
- ▶ Piab replaces or repairs, free of charge, faulty products provided that these are returned to Piab, and found to be covered by the warranty.
- ▶ It is at Piab's discretion whether a faulty product should be sent back to Piab for replacement or if the repair shall be made locally at Piab's expense.
- ▶ This warranty does not include wear parts such as suction cups, filter elements, sealings, hoses, etc.
- ▶ This warranty does not include subsequent damages caused by defective products.

AMERICAS

ARGENTINA

Piab Argentina S.A.
25 de Mayo 1807
San Martín
AR-1650 BUENOS AIRES
Phone: +54 11 4713 8550
Fax: +54 11 4713 8552
Email: info-argentina@piab.com

BRAZIL

Regional office South America
Piab do Brasil Ltda.
R. Capitão Joaquim da Silva Rocha, 50
Jardim Ana Maria
BR-13208-750 JUNDIAI – SP
Phone: +55 11 4492 9050
Fax: +55 11 4522 4066
Email: info-brasil@piab.com

MEXICO

Piab Mexico & Central América
65 Sharp Street
HINGHAM MA 02043 US
Phone: +1 781 337 7309
Fax: +1 781 337 6864
Email: info-mxca@piab.com

USA/CANADA

Regional office North America
Piab USA, Inc.
65 Sharp Street
HINGHAM MA 02043 US
Phone: +1 781 337 7309
Fax: +1 781 337 6864
Email: info-usa@piab.com

ASIA

CHINA

Piab (Shanghai) Co., Ltd
Unit 401, Blk B1, No. 6000 Shenzhuan Rd
Songjiang District
CN-201619 SHANGHAI
Phone: +86 21 5237 6545
Fax: +86 21 5237 6549
Email: info-china@piab.com

INDIA

Piab Vacuum Technology Pvt. Ltd
Plot no 11/C8, 11th block,
Mugappair East,
IN-600 037 CHENNAI
Phone: +91 9444 25 36 48
Email: info-india@piab.com

JAPAN

Piab Japan Ltd.
8-43-17 Tateishi Katsushika-ku,
JP-124-0012 TOKYO
Phone: +81 3 6662 8118
Fax: +81 3 6662 8128
Email: info-japan@piab.com

SINGAPORE

Regional office Asia Pacific
Piab Asia Pte Ltd
4008 Ang Mo Kio Ave 10
03-16 Techplace 1
SG-569625 SINGAPORE
Phone: +65 6455 7006
Fax: +65 6455 0081
Email: info-singapore@piab.com

SOUTH KOREA

Piab Korea Ltd
C-2402 Daelim Acrotel
KR-Kangnam-Gu 467-6
DOKOK-DONG
Phone: +82 2 3463 0751
Fax: +82 2 3463 0754
Email: info-korea@piab.com

EUROPE

FRANCE

Piab
Parc d'entreprises L'Esplanade
10 rue Enrico Fermi
Saint-Thibault des Vignes
FR-77462 LAGNY SUR MARNE Cedex
Phone: +33 1 6430 8267
Fax: +33 1 6430 8285
Email: info-france@piab.com

GERMANY

Regional office Europe
Piab Vakuum GmbH
Otto-Hahn-Str. 14
DE-35510 BUTZBACH
Phone: +49 6033 7960 – 0
Fax: +49 6033 7960 – 199
Email: info-germany@piab.com

ITALY

Piab ITALIA Srl
Via Cuniberti, 58
IT-10151 TORINO
Phone: +39 011 226 36 66
Fax: +39 011 226 21 11
Email: info-italy@piab.com

POLAND

Piab Polska Sp. z o.o.
Ul. Astronomow 1
PL-80-299 GDANSK
Phone: +48 58 785 08 50
Fax: +48 58 785 08 51
Email: info-poland@piab.com

SPAIN

Vacío Piab, S.L.
Avda. Pineda, 2
CASTELLDEFELS
ES-08860 BARCELONA
Phone: +34 93 6333876
Fax: +34 93 6380848
Email: info-spain@piab.com

SWEDEN

Head office
Piab AB
Box 4501
SE-183 04 TÄBY
Phone: +46 8 630 25 00
Fax: +46 8 630 26 90
Email: info-sweden@piab.com

UNITED KINGDOM

Piab Ltd.
Vacuum Innovation House
Station Road
GB-LE12 6LQ EAST LEAKE
Phone: +44 1509 857 010
Fax: +44 1509 857 011
Email: info-uk@piab.com

No need to compromise

www.piab.com