

## ○ STARVIEW SP-2436 SKIN PACKAGING MACHINE

### *Quotation and Specification Model SP-2436*



**SP Series Skin Packaging Machine shown with  
Optional Class 4 safety, automatic film clamping frame  
and film temperature sensor system**


#### **At a glance:**

- ★ Industrial Floor Model Skin Packaging Machine for 24" x 36" skin cards
- ★ Use for retail carded packaging or shipping containment
- ★ Energy saving impulse heating instant-on quartz heater system with heater oven watt-density adjustable over the heating cycle. Convenient HMI bar graph interface.
- ★ Starview's exclusive programmable turbine vacuum control standard. Easy HMI bar graph interface
- ★ In-feed table, out-feed table & hot wire cut-off standard
- ★ Custom machine sizes and features quoted on request

## ○ SPECIFICATIONS

Specifications:	
Electrical:	208-240 Volts / 3 PH / 70 Amps
Control:	24 Volts DC
Heating system:	Tubular quartz 18.6 KW
Vacuum system:	2 Turbines @ 100 cfm ea.
Maximum card size:	24" x 36"
Film width max / min :	26.5" / 26.0"
Maximum film roll diameter:	10"
Maximum product height:	10"
Air inlet size:	1/4" NPT female
Maximum air consumption per cycle:	0.4 scf @ 100 psi
Cycle times:	Variable 15-60 seconds
Approximate dimensions ( <i>including in-feed &amp; out-feed tables</i> ):	116"W. x 38"D x 63"H
Working Height:	40.0"
Approximate weight:	550 LB.

Machine Floor Plan:	E=Electrical Connection A=Air Connection
---------------------	---

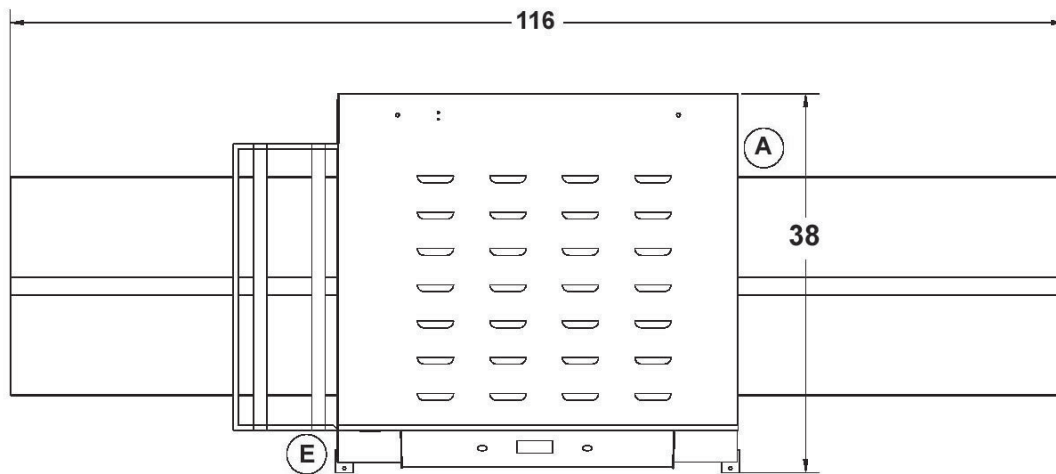

## ○ STARVIEW RP28-2 ROLLER DIE CUTTER

### *Quotation and Specification Model RP28-2*



**Typical RP Die Cutting Machine**

#### **At a glance:**

- ★ **Double driven pressure roller design for improved cutting registration**
- ★ **Heavy-duty 7.5" pressure rolls and 2 HP drive motor**
- ★ **Uses standard steel rule dies**
- ★ **Die cutting occurs as die passes between rollers in both directions**
- ★ **Custom machine sizes and features quoted on request**


#### **Standard Features:**

- ★ **Main power OFF / ON switch/circuit breaker**
- ★ **Cycle OFF / ON pushbuttons**
- ★ **Emergency STOP push button**
- ★ **Operator safety guards with automatic reversing (2)**
- ★ **Upper and lower pressure rollers powered**
- ★ **Steel-chrome free running feed conveyor rollers**
- ★ **Soft start / soft stop drive system reduces vibration and wear**
- ★ **Accurate single point height adjustment**
- ★ **One (1) polypropylene striker plate included**
- ★ **Welded heavy-wall steel tube construction**
- ★ **CSA certified**
- ★ **Steel components painted blue color**

## ○ SPECIFICATIONS

Specifications:	
Electrical:	208-230 Volts/ 3PH/ 15 Amps
Drive Motor:	2 HP
Pressure roller diameter:	7.5"
Maximum standard trim die height:	6.0"
Minimum gap between rollers:	1"
Maximum die width:	29"
Maximum die length:	Unlimited with proper support
Conveyors:	2 @ 29.5"W x 48" L
Cycle speed:	Variable 1 to 4 on average
Approximate dimensions:	42"D. x 113"W x 53"H
Working Height:	34.5"
Approximate weight:	850 LB.

### Machine Floor Plan: E=Electrical Connection

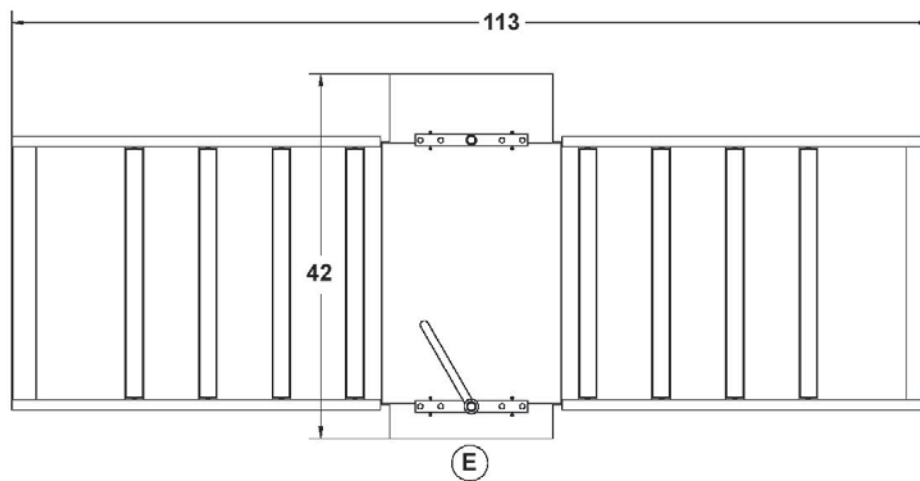

### Description:

Starview's RP Series Roller Die Cutters are versatile enough to handle a full range of low to high production requirements. These machines will trim a wide range of materials such as skin packaged products, thermoformed products, cork, rubber and any other application where a steel rule die can be utilized. Single driven pressure roller machines may be used where cutting registration is not critical and cutting pressures are low. Double driven pressure roller machines should be used where registration is important or for higher cutting pressures. For applications where it is advantageous to cut with the product facing up or have the ability to program cutting without manufacturing steel rule dies for each configuration please consider or **SDC Series Slitter/Die Cutters**.