


Tensor T-1400 Press

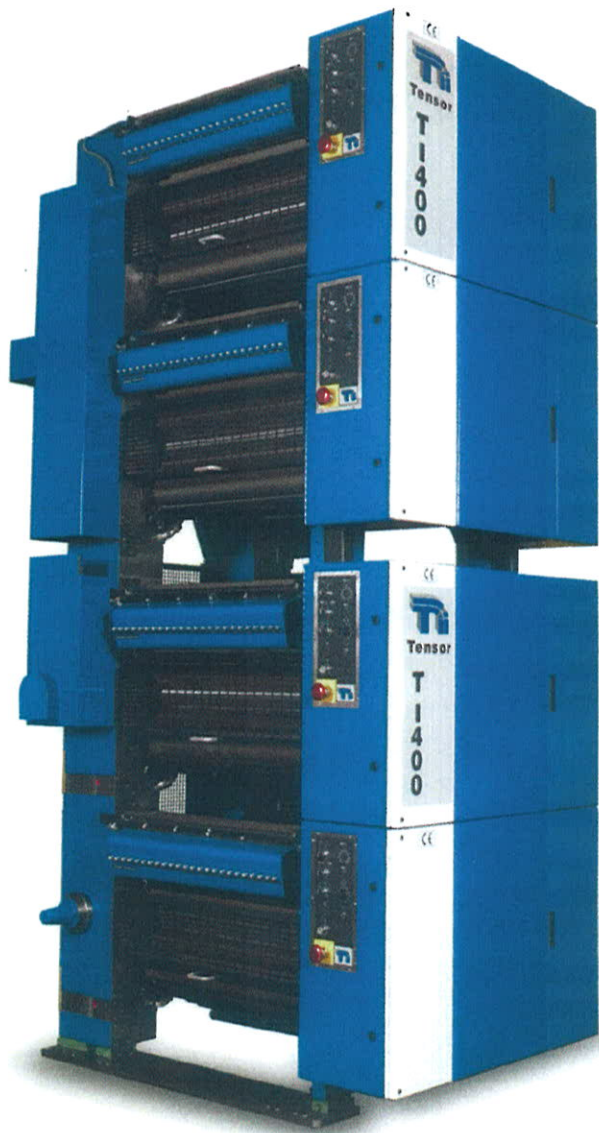

ERGONOMICAL DESIGN, ECONOMICAL VALUE

Value

- Maximum printing speed of 35,000 IPH
- Rapid makeready and quick "no tool" plate change design encourages versatility of product mix
- The optional reel-type blanket lock-ups reduce cylinder gaps and offer newsprint savings without sacrificing image area

Design

- Unique "bearing-in-a-bearing" eccentric design provides optimum dynamic support of the blanket cylinders, reducing print disturbance
- Stainless steel clad cylinders with unique tapered journal design add stiffness for improved print and registration control
- Arch geometry provides enhanced ergonomics for ease of maintenance

Endurance

- Thousands of T-1400 units in operation worldwide
- Eccentric design provides unsurpassed durability in the critical frame bore area, thus providing very long equipment service life
- Centralized lubrication and pneumatics are standard features on the Tensor T-1400 series press; optional motorized registration available

TENSOR'S T-1400 UNITS ARE AVAILABLE AS FLOOR UNITS MOUNTED ON A ROLL-STAND, 2-HIGH, 3-HIGH OR 4-HIGH ARRANGEMENTS, AND CAN BE ADAPTED TO RUN WITH ANY PRESS LINE.

T-1400

STANDARD FEATURES AND SPECIFICATIONS

Plate & Blanket Cylinders

- Stainless steel clad cylinders provide unsurpassed durability and corrosion resistance
- Ultra-narrow gap (1/16", 1.52mm) plate cylinders with register pin
- T-bar lock-up on blanket cylinders
- Timken tapered cylinder bearings
- Heavy-duty impression linkage
- Teflon sleeved plate eccentrics

Inking System/Dampener System

- Continuous sock dampeners
- Swing-down cast iron ink fountains for rapid, easy color clean-up with improved lever style adjustments
- Self-sealing ink fountain ends
- 8-roller ink train with 2 ink forms
- 2 gear-driven oscillators per couple
- Nylon micrometric rollers and nylon ink vibrator rollers
- Gear-driven ink fountain rollers

Operation & Drive System

- Unit shaftless
- Oil bath gear housing with self-contained mechanical pump
- Interlocked safety guards
- Centralized grease lubrication system
- Pneumatic throw-off for impression, ink form, dampener form and ink feed rollers with individual #10 and #13 controls
- #10 side running circumferential register for easy register adjustments
- Unit to unit register controlled by the unit drive motor
- Easy access polycarbonate drive side doors, easy visual inspection & maintenance
- Operator's cover has removable panels for quick access to components

Technical Specifications

RUNNING SIDELAY REGISTER:

- +.160" IN, -.160" OUT
- +4.06mm IN, -4.06mm OUT

Technical Specifications (CONTINUED)

RUNNING CIRCUMFERENTIAL REGISTER:

- +.060" Advance, -.060" Retard
- +1.5mm Advance, -1.5mm Retard

PRESS SPEED (MAXIMUM):

- 35,000 IPH

UNIT DIMENSIONS @ 35" WEB:

- 32" H x 68" W x 43"L
- 812mm H x 1727mm W x 1092mm L

UNIT WEIGHT:

- 6,200 lbs. (approx. ship weight)
- 2,812 kilos (approx. ship weight)

Available Options

- Line driven shaft configuration
- Spiral brush dampeners or spray bars
- Motorized ink fountain rollers with proportional inking
- Segmented ink fountain blades
- Narrow gap reel-type lock-up blanket cylinders
- Remote ink system
- Integrated Closed Loop Inspection System available with:
 - > Color register
 - > Cut-off
 - > Color density
- Heatset or UV packages
- Optional oil cooling to increase speed to 45,000 IPH
- Chilled ink vibrators

Cutoff and Web Widths

CUTOFF:

- 19" through 24.8" (482mm through 630mm)

WEB WIDTHS:

- Web widths up to 40" (1016mm)



10330 Argonne Woods Drive, Suite 300 • Woodridge, IL USA 60517
p. 630-739-9600 • f. 630-739-9339 • www.ustensor.com